

MK2 setup instructions

Installation

Content of package

- 1 x CPU
- 1 x Projection Module
- 1 x Speaker
- 1 x CPU power adapter
- 2 x Power cords
- 1 x HDMI cable
- 1 x LAN cable
- 1 x USB - USB-C cable
- 1 x Minijack cable
- 4 x Cable guides
- Mounting accessory if applies





Size and Weight

	Weight	Width	Height	Depth
Projection Module	19,8 Kg	400 mm.	479 mm.	288 mm.
Wheeled Stand	15 Kg	511 mm.	1583 mm.	585 mm.

Mounting Options



Ceiling mount






1. Position the ceiling mount on top of the projection module.
2. Place and tighten the 4 screws using the allen wrench.
3. Place the CPU holder brackets around the ceiling mount.
4. Tighten the bracket using the tightening knob, make sure the bracket is firm and in place.
5. Place and tighten the 2 screws on the CPU.
6. Position the CPU on the brackets and slide into place.
7. Clip the 4 cable grips to the ceiling mount.

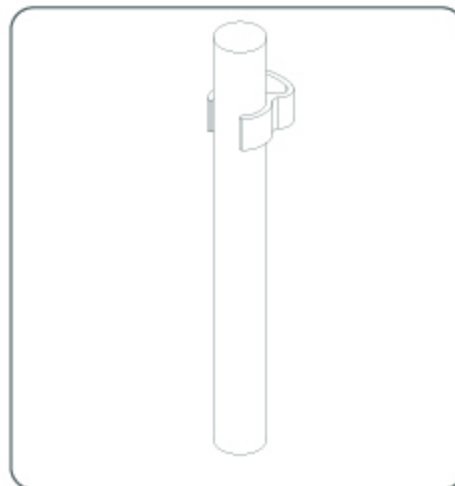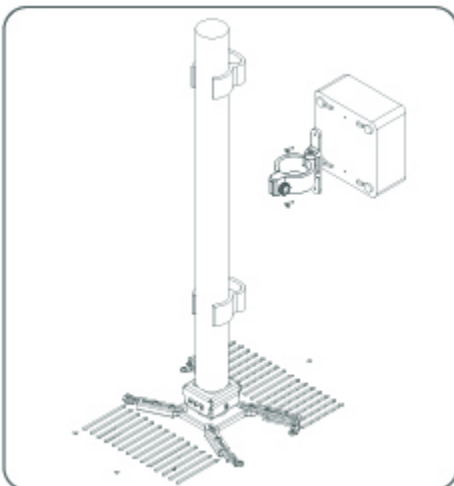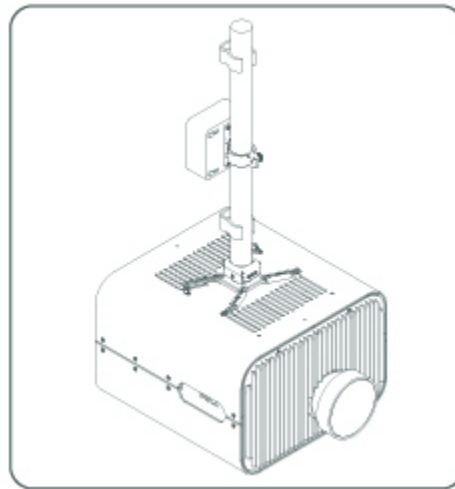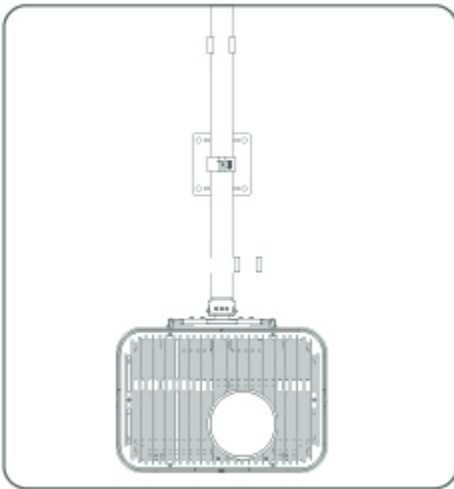

Wheeled stand

1. Attach the centre tray to the legs using the tightening knobs.
2. Screw the upper tray to the legs.
3. Attach the lower tray to the legs using the tightening knobs.
4. Screw the 2 wheels with brakes to the 2 rear-facing legs.
5. Screw the 2 wheels without brakes to the 2 front-facing legs.
6. Place and tighten the CPU holders to the lower tray.
7. Position the CPU and the power strip (if applies) inside the tray.
8. Place the lid on the lower tray.
9. Clip the 4 holders to the upper tray.
10. Clip the 6 cable grips to one of the rear-facing legs.
11. Remove the levellers from the bottom of the Projection Module.
12. Position and centre the Projector Module on the wheeled stand.
13. Secure the Projection Module to the wheeled stand using the main tightening knob.

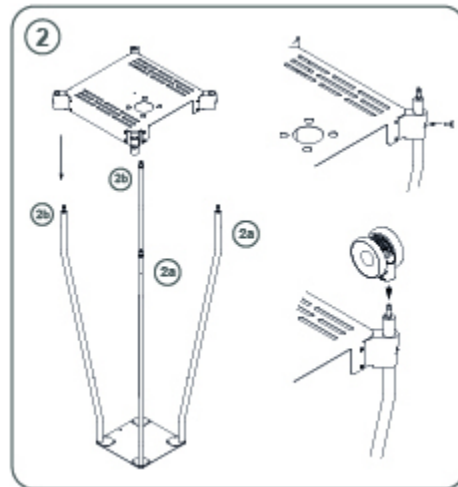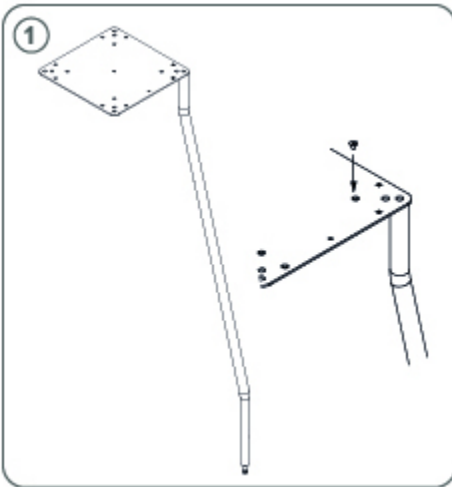

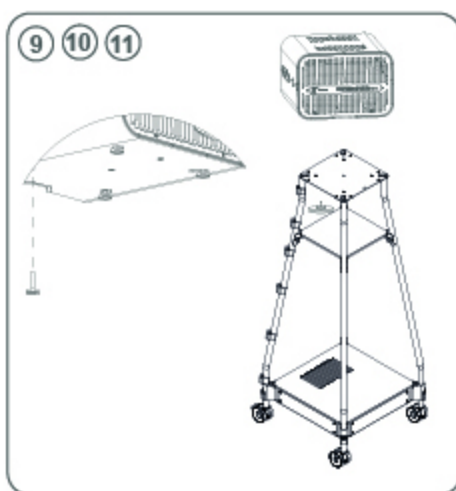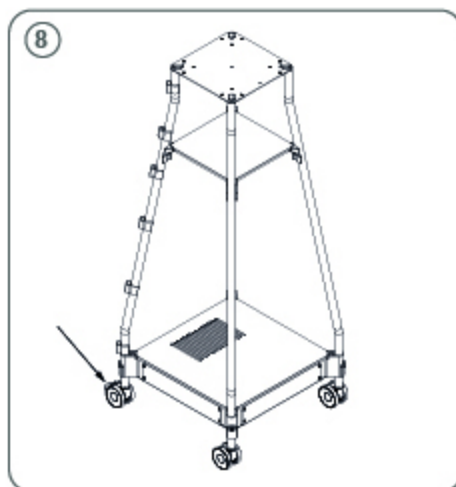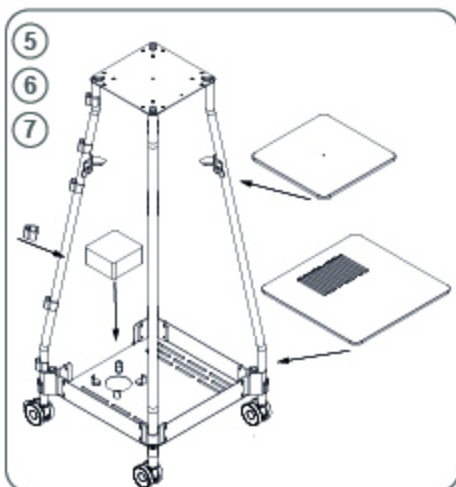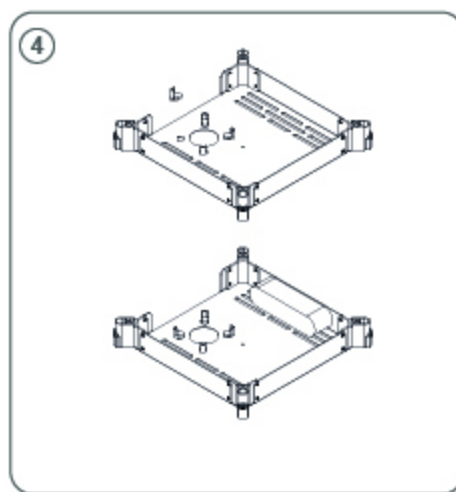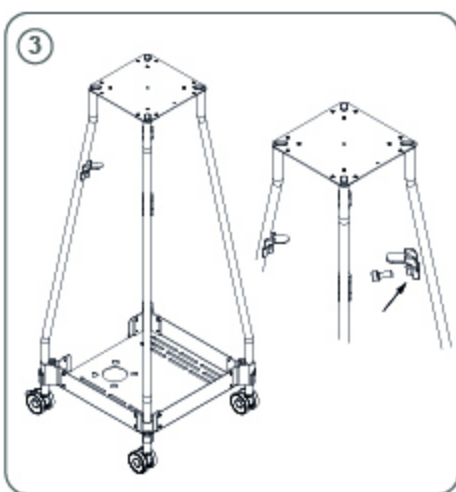

Connections

1. Connect the HDMI cable to the “HDMI” connection of the CPU.
2. Connect the other end of the HDMI cable to the “HDMI1” connection of the Projection Module.
3. Connect a Lan cable from the Lan port on the CPU to a free Lan port on your router.
4. Connect the speaker to the CPU using the minijack cable.
5. Connect the speaker to the Projection Module using the USB - USB-C cable.
6. Power on the speaker using the Power On button.
7. Connect the Projection Module to a power socket using the power adapter.
8. Connect the CPU to a power socket using the power adapter.



Connect and power on the speaker before powering on the CPU. If a “choose audio output” message is displayed, power off then power on the CPU with the speaker connected and powered on.

Projection adjustments

1. Remove the back panel of the projection module which is held into place by magnets.
2. Reach out over the projector inside the casing until you feel 3 adjustment wheels.
3. Set the image to the widest display using the Zoom wheel on the projection module.
4. Adjust the Lens Shift slider so that the bottom of the projected image touches the floor.
5. Adjust the Focus wheel until a crisp image is displayed.

Please find [here](#) a video tutorial for projection adjustments.

Operating conditions

- Use in dry, clean and ventilated environments.
 - Ambient temperature: 12-28°C (54-82°F).
 - Ambient humidity: max 50%
 - Maximum continued use time: 8h
 - Power off the projector using the remote control for 15 minutes after every 2 hours of use.
-

Maintenance

Monthly maintenance

Clean the casing, lens and floor / ceiling mount using isopropyl alcohol and a soft microfiber wipe.

Do not spray the alcohol directly on the projector's components.

Lamp replacement

The projector's lamp has a lifespan of 4500 hours.

Once it reaches this limit, a message will be displayed.

Please contact us for instructions for replacing the lamp.

Warranty

Whose Warranty is this?

This limited consumer warranty (the "Warranty") has been issued by Broomx Technologies ("Broomx", "we" or "our").

Who is this Guarantee for?

Broomx has issued this Warranty to you, as a consumer who has purchased from Broomx, or from an authorized seller, a new product covered by warranty ("you"). This Warranty cannot be assigned or transferred to any buyer or subsequent user and is not available for products that are purchased already used or from a source other than Broomx or an authorized seller.

What does this Warranty do?

This Warranty gives you certain legal rights, regardless of other rights that you may have, which vary from state to state and from country to country. This Warranty does not affect any of the rights that you have recognized under the laws of your jurisdiction in relation to the sale of consumer goods (including, without limitation, national laws that implement the European Directive 1999/44 / EC).

How long does the coverage last?

This Limited Warranty covers one (1) year from the date of purchase or shipment of the Product, whichever is later (the "Warranty Period"). However, if you purchased the Product within the European Union, the Warranty Period will be two (2) years.

What will Broomx do if there is a problem with the product?

If your Product is defective or malfunctions, we will repair or replace such Product or update software or support so that the Product behaves substantially in accordance with the Guaranteed Functionality. The criteria adopted to resolve these matters will

be chosen solely by us. If we decide that a product should be replaced, the replacement may be for a new or remanufactured Product. If we decide, in our sole discretion, that none of the means referred to is reasonably adequate for the defect or malfunction, then we may refund the price you paid for the purchase of the Product.

How can I get assistance?

First, by informing us of the problem. If you have a problem with your Product, please visit us at www.broomx.com or send an email to support@broomx.com for useful assistance and contact information and to submit a claim form and obtain warranty service.

If it is necessary to send your Product to receive assistance, you will be responsible for the shipping costs, attaching the purchase receipt with the Product.

By shipping the Product, you agree to transfer possession of the Product to Broomx. Upon receipt of the product, we will assess whether there is a defect or malfunction that is covered by this Warranty. If we find a defect or malfunction covered by this Warranty, we will proceed to repair or replace the Product to provide it with the Guaranteed Functionality and we will send you the repaired or replaced Product assuming only the shipping costs. We may not return the original Product to you. We cannot guarantee that we will be able to repair the Product without risk or loss of content or files; Any replacement of Product will not contain the files saved in the original Product. Any repair or replacement of Product will continue to be covered by this Warranty during the remaining Warranty Period of the original Product or for ninety (90) days after receipt of the replaced or repaired Product, whichever is longer.

What does this Warranty not cover?

This Warranty is limited and does not apply to: (i) wear and tear, (ii) damage caused by improper use, accident (for example, accidental blow, exposure to liquids, food or other contaminants, etc.), negligence, abuse, Improper or unauthorized alteration, repair or modification, manipulation or use with inappropriate equipment, devices, software, services or other article (s) of unauthorized third parties; (iii) use not in accordance with the Product documentation; (iv) commercial use; (v) use in connection with a trade, business or profession; (vi) used or resold products; (vii) Products purchased from sources other than Broomx or Broomx authorized vendors (including unauthorized online auctions), (viii) Products other than Broomx; (ix) use of the Product in violation of any law, regulation or standard in force in the place

where the Product is used; or (x) characteristics or behavioral parameters that pertain to any software or assistance beyond the Guaranteed Product Functionality.

This Warranty does not include a specific warranty that the product will be free from errors or a specific warranty regarding uptime or continued availability, security features of software data or online accounts, or the uninterrupted or error-free operation of any software, firmware or online site. This limited warranty is void if the Product is returned with labels removed, damaged or tampered with or with any alteration (including the unauthorized removal of any component or outer covering).

This Warranty does not cover loss of files; You are responsible for regularly making copies of your data, electronically or physically, if you wish to keep them. Any damage or costs related to data recovery, deletion or installation are not recoverable under this Warranty.

In this Warranty, Broomx does not extend any implied or legal warranties, conditions or statements regarding the Product or any related software or online assistance.

UNDER THIS LIMITED WARRANTY, BROOMX ASSUMES NO LIABILITY FOR ANY SPECIFIC, INDIRECT, INCIDENTAL, CONSEQUENTIAL DAMAGES, OR CONSEQUENTIAL DAMAGES, OF ANY KIND, PURSUING (BUT NOT EXCLUSIVELY) INJURY, PAYMENT OF LOSS, LOSS AND LOSS OF USE OF THE PRODUCT OR ANY ASSOCIATED EQUIPMENT, COST OF ANY ITEM REPLACEMENT OR EQUIPMENT REPLACEMENT, OR LOSS OF USE DURING THE PERIOD IN WHICH THE PRODUCT IS BEING REPLACED OR REPAIRED. IN ADDITION, IN NO EVENT SHALL BROOMX BE LIABLE TO YOU FOR ANY SPECIFIC, INDIRECT, INCIDENTAL, DAMAGES, OR CONSEQUENTIAL DAMAGES OF ANY KIND, EVEN IF BROOMX HAS BEEN ADVISED OF ANY SUCH DAMAGES. CLAIM ARISING FROM OR RELATED TO THIS WARRANTY CERTIFICATE, REGARDLESS OF THE FORM OF ACTION, WHETHER UNDER CONTRACT, EXTRA-CONTRACTUAL LIABILITY (INCLUDING NEGLIGENCE), LIABILITY FOR ANY DEFECTIVE PRODUCT OR ANY OTHER JURISDICTION.

IN NO EVENT SHALL BROOMX'S LIABILITY FOR ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THIS WARRANTY CERTIFICATE EXCEED THE PRICE PAID FOR THE PURCHASE OF THE PRODUCT, REGARDLESS OF ANY CONTRACT, LIABILITY), OBJECTIVE LIABILITY FOR A DEFECTIVE PRODUCT OR ANY OTHER CAUSE OR LEGAL OR EQUITY THEORY.